

Solutions Manual
for
Fundamentals of Thermal Fluid Sciences
5th Edition
Yunus A. Çengel, John M. Cimbala, Robert H. Turner
McGraw-Hill, 2017

Chapter 1
INTRODUCTION AND OVERVIEW

PROPRIETARY AND CONFIDENTIAL

This Manual is the proprietary property of McGraw-Hill Education and protected by copyright and other state and federal laws. By opening and using this Manual the user agrees to the following restrictions, and if the recipient does not agree to these restrictions, the Manual should be promptly returned unopened to McGraw-Hill Education: **This Manual is being provided only to authorized professors and instructors for use in preparing for the classes using the affiliated textbook. No other use or distribution of this Manual is permitted. This Manual may not be sold and may not be distributed to or used by any student or other third party. No part of this Manual may be reproduced, displayed or distributed in any form or by any means, electronic or otherwise, without the prior written permission of McGraw-Hill Education.**

Thermodynamics, Heat Transfer, and Fluid Mechanics

1-1C On a downhill road the potential energy of the bicyclist is being converted to kinetic energy, and thus the bicyclist picks up speed. There is no creation of energy, and thus no violation of the conservation of energy principle.

1-2C There is no truth to his claim. It violates the second law of thermodynamics.

1-3C A car going uphill without the engine running would increase the energy of the car, and thus it would be a violation of the first law of thermodynamics. Therefore, this cannot happen. Using a level meter (a device with an air bubble between two marks of a horizontal water tube) it can be shown that the road that looks uphill to the eye is actually downhill.

1-4C Thermodynamics deals with the amount of heat transfer as a system undergoes a process from one equilibrium state to another. Heat transfer, on the other hand, deals with the rate of heat transfer as well as the temperature distribution within the system at a specified time.

1-5C (a) The driving force for heat transfer is the temperature difference. (b) The driving force for electric current flow is the electric potential difference (voltage). (c) The driving force for fluid flow is the pressure difference.

1-6C Heat transfer is a non-equilibrium phenomena since in a system that is in equilibrium there can be no temperature differences and thus no heat flow.

1-7C No, there cannot be any heat transfer between two bodies that are at the same temperature (regardless of pressure) since the driving force for heat transfer is temperature difference.

1-8C **Stress** is defined as force per unit area, and is determined by dividing the force by the area upon which it acts. The normal component of a force acting on a surface per unit area is called the **normal stress**, and the tangential component of a force acting on a surface per unit area is called **shear stress**. In a fluid, the normal stress is called **pressure**.

Mass, Force, and Units

1-9C Kg-mass is the mass unit in the SI system whereas kg-force is a force unit. 1-kg-force is the force required to accelerate a 1-kg mass by 9.807 m/s^2 . In other words, the weight of 1-kg mass at sea level is 1 kg-force.

1-10C In this unit, the word *light* refers to the speed of light. The light-year unit is then the product of a velocity and time. Hence, this product forms a distance dimension and unit.

1-11C There is no acceleration, thus the net force is zero in both cases.

1-12 The variation of gravitational acceleration above the sea level is given as a function of altitude. The height at which the weight of a body will decrease by 0.3% is to be determined.

Analysis The weight of a body at the elevation z can be expressed as

$$W = mg = m(9.807 - 3.32 \times 10^{-6}z)$$

In our case,

$$W = (1 - 0.3/100)W_s = 0.997W_s = 0.997mg_s = 0.997(m)(9.807)$$

Substituting,

$$0.997(9.807) = (9.807 - 3.32 \times 10^{-6}z) \longrightarrow z = \mathbf{8862 \text{ m}}$$



1-13 The mass of an object is given. Its weight is to be determined.

Analysis Applying Newton's second law, the weight is determined to be

$$W = mg = (200 \text{ kg})(9.6 \text{ m/s}^2) = \mathbf{1920 \text{ N}}$$

1-14 A plastic tank is filled with water. The weight of the combined system is to be determined.

Assumptions The density of water is constant throughout.

Properties The density of water is given to be $\rho = 1000 \text{ kg/m}^3$.


Analysis The mass of the water in the tank and the total mass are

$$m_w = \rho V = (1000 \text{ kg/m}^3)(0.2 \text{ m}^3) = 200 \text{ kg}$$

$$m_{\text{total}} = m_w + m_{\text{tank}} = 200 + 3 = 203 \text{ kg}$$

Thus,

$$W = mg = (203 \text{ kg})(9.81 \text{ m/s}^2) \left(\frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) = \mathbf{1991 \text{ N}}$$

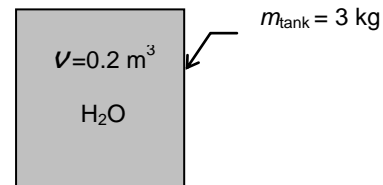

1-15E The constant-pressure specific heat of air given in a specified unit is to be expressed in various units.

Analysis Using proper unit conversions, the constant-pressure specific heat is determined in various units to be

$$c_p = (1.005 \text{ kJ/kg} \cdot ^\circ\text{C}) \left(\frac{1 \text{ kJ/kg} \cdot \text{K}}{1 \text{ kJ/kg} \cdot ^\circ\text{C}} \right) = \mathbf{1.005 \text{ kJ/kg} \cdot \text{K}}$$

$$c_p = (1.005 \text{ kJ/kg} \cdot ^\circ\text{C}) \left(\frac{1000 \text{ J}}{1 \text{ kJ}} \right) \left(\frac{1 \text{ kg}}{1000 \text{ g}} \right) = \mathbf{1.005 \text{ J/g} \cdot ^\circ\text{C}}$$

$$c_p = (1.005 \text{ kJ/kg} \cdot ^\circ\text{C}) \left(\frac{1 \text{ kcal}}{4.1868 \text{ kJ}} \right) = \mathbf{0.240 \text{ kcal/kg} \cdot ^\circ\text{C}}$$

$$c_p = (1.005 \text{ kJ/kg} \cdot ^\circ\text{C}) \left(\frac{1 \text{ Btu/lbm} \cdot ^\circ\text{F}}{4.1868 \text{ kJ/kg} \cdot ^\circ\text{C}} \right) = \mathbf{0.240 \text{ Btu/lbm} \cdot ^\circ\text{F}}$$

1-16 A rock is thrown upward with a specified force. The acceleration of the rock is to be determined.

Analysis The weight of the rock is


$$W = mg = (3 \text{ kg})(9.79 \text{ m/s}^2) \left(\frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) = 29.37 \text{ N}$$


Then the net force that acts on the rock is

$$F_{\text{net}} = F_{\text{up}} - F_{\text{down}} = 200 - 29.37 = 170.6 \text{ N}$$

From the Newton's second law, the acceleration of the rock becomes

$$a = \frac{F}{m} = \frac{170.6 \text{ N}}{3 \text{ kg}} \left(\frac{1 \text{ kg} \cdot \text{m/s}^2}{1 \text{ N}} \right) = \mathbf{56.9 \text{ m/s}^2}$$



1-17  Problem 1-16 is reconsidered. The entire software solution is to be printed out, including the numerical results with proper units.

Analysis The problem is solved using EES, and the solution is given below.

"The weight of the rock is"

$$W=m*g$$

$$m=3 \text{ [kg]}$$

$$g=9.79 \text{ [m/s}^2\text{]}$$

"The force balance on the rock yields the net force acting on the rock as"

$$F_{\text{up}}=200 \text{ [N]}$$

$$F_{\text{net}} = F_{\text{up}} - F_{\text{down}}$$

$$F_{\text{down}}=W$$

"The acceleration of the rock is determined from Newton's second law."

$$F_{\text{net}}=m*a$$

"To Run the program, press F2 or select Solve from the Calculate menu."

SOLUTION

$$a=56.88 \text{ [m/s}^2\text{]}$$

$$F_{\text{down}}=29.37 \text{ [N]}$$

$$F_{\text{net}}=170.6 \text{ [N]}$$


$$F_{\text{up}}=200 \text{ [N]}$$

$$g=9.79 \text{ [m/s}^2\text{]}$$

$$m=3 \text{ [kg]}$$

$$W=29.37 \text{ [N]}$$

m [kg]	a [m/s ²]
1	190.2
2	90.21
3	56.88
4	40.21
5	30.21
6	23.54
7	18.78
8	15.21
9	12.43
10	10.21

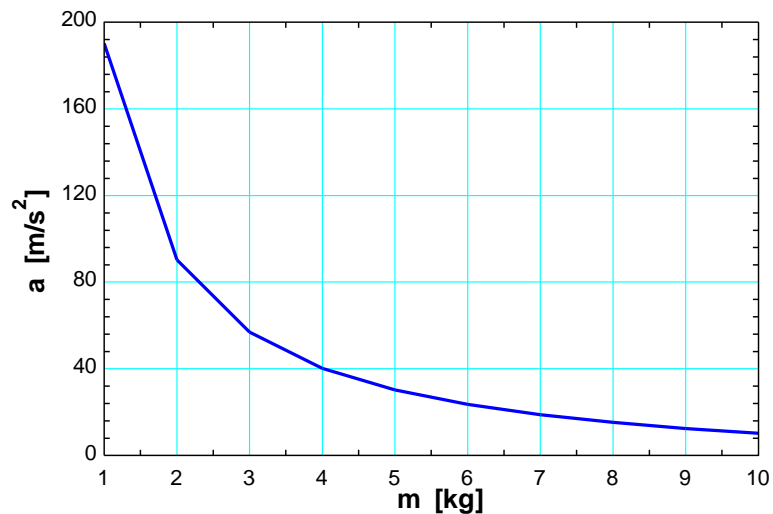

1-18 A resistance heater is used to heat water to desired temperature. The amount of electric energy used in kWh and kJ are to be determined.

Analysis The resistance heater consumes electric energy at a rate of 4 kW or 4 kJ/s. Then the total amount of electric energy used in 3 hours becomes

$$\begin{aligned}\text{Total energy} &= (\text{Energy per unit time})(\text{Time interval}) \\ &= (4 \text{ kW})(3 \text{ h}) \\ &= \mathbf{12 \text{ kWh}}\end{aligned}$$

Noting that 1 kWh = (1 kJ/s)(3600 s) = 3600 kJ,

$$\begin{aligned}\text{Total energy} &= (12 \text{ kWh})(3600 \text{ kJ/kWh}) \\ &= \mathbf{43,200 \text{ kJ}}\end{aligned}$$

Discussion Note kW is a unit for power whereas kWh is a unit for energy.

1-19E An astronaut took his scales with him to space. It is to be determined how much he will weigh on the spring and beam scales in space.

Analysis (a) A spring scale measures weight, which is the local gravitational force applied on a body:

$$W = mg = (150 \text{ lbm})(5.48 \text{ ft/s}^2) \left(\frac{1 \text{ lbf}}{32.2 \text{ lbm} \cdot \text{ft/s}^2} \right) = \mathbf{25.5 \text{ lbf}}$$

(b) A beam scale compares masses and thus is not affected by the variations in gravitational acceleration. The beam scale will read what it reads on earth,

$$W = \mathbf{150 \text{ lbf}}$$

1-20 A gas tank is being filled with gasoline at a specified flow rate. Based on unit considerations alone, a relation is to be obtained for the filling time.

Assumptions Gasoline is an incompressible substance and the flow rate is constant.

Analysis The filling time depends on the volume of the tank and the discharge rate of gasoline. Also, we know that the unit of time is ‘seconds’. Therefore, the independent quantities should be arranged such that we end up with the unit of seconds. Putting the given information into perspective, we have

$$t \text{ [s]} \leftrightarrow V \text{ [L]}, \text{ and } \dot{V} \text{ [L/s]}$$

It is obvious that the only way to end up with the unit “s” for time is to divide the tank volume by the discharge rate. Therefore, the desired relation is

$$t = \frac{V}{\dot{V}}$$

Discussion Note that this approach may not work for cases that involve dimensionless (and thus unitless) quantities.

1-21 A pool is to be filled with water using a hose. Based on unit considerations, a relation is to be obtained for the volume of the pool.

Assumptions Water is an incompressible substance and the average flow velocity is constant.

Analysis The pool volume depends on the filling time, the cross-sectional area which depends on hose diameter, and flow velocity. Also, we know that the unit of volume is m^3 . Therefore, the independent quantities should be arranged such that we end up with the unit of seconds. Putting the given information into perspective, we have

$$V [\text{m}^3] \text{ is a function of } t [\text{s}], D [\text{m}], \text{ and } V [\text{m/s}]$$

It is obvious that the only way to end up with the unit “ m^3 ” for volume is to multiply the quantities t and V with the square of D . Therefore, the desired relation is

$$V = CD^2Vt$$

where the constant of proportionality is obtained for a round hose, namely, $C = \pi/4$ so that $V = (\pi D^2/4)Vt$.

Discussion Note that the values of dimensionless constants of proportionality cannot be determined with this approach.

Review Problems

1-22 The gravitational acceleration changes with altitude. Accounting for this variation, the weights of a body at different locations are to be determined.

Analysis The weight of an 80-kg man at various locations is obtained by substituting the altitude z (values in m) into the relation

$$W = mg = (80\text{kg})(9.807 - 3.32 \times 10^{-6} z \text{ m/s}^2) \left(\frac{1\text{N}}{1\text{kg} \cdot \text{m/s}^2} \right)$$

Sea level: $(z = 0 \text{ m}): W = 80 \times (9.807 - 3.32 \times 10^{-6} \times 0) = 80 \times 9.807 = \mathbf{784.6 \text{ N}}$

Denver: $(z = 1610 \text{ m}): W = 80 \times (9.807 - 3.32 \times 10^{-6} \times 1610) = 80 \times 9.802 = \mathbf{784.2 \text{ N}}$

Mt. Ev.: $(z = 8848 \text{ m}): W = 80 \times (9.807 - 3.32 \times 10^{-6} \times 8848) = 80 \times 9.778 = \mathbf{782.2 \text{ N}}$

1-23E A man is considering buying a 12-oz steak for \$3.15, or a 300-g steak for \$2.95. The steak that is a better buy is to be determined.

Assumptions The steaks are of identical quality.


Analysis To make a comparison possible, we need to express the cost of each steak on a common basis. Let us choose 1 kg as the basis for comparison. Using proper conversion factors, the unit cost of each steak is determined to be

12 ounce steak:

$$\text{Unit Cost} = \left(\frac{\$3.15}{12 \text{ oz}} \right) \left(\frac{16 \text{ oz}}{1 \text{ lbm}} \right) \left(\frac{1 \text{ lbm}}{0.45359 \text{ kg}} \right) = \mathbf{\$9.26/\text{kg}}$$

300 gram steak:

$$\text{Unit Cost} = \left(\frac{\$2.95}{300 \text{ g}} \right) \left(\frac{1000 \text{ g}}{1 \text{ kg}} \right) = \mathbf{\$9.83/\text{kg}}$$



Therefore, the steak at the traditional market is a better buy.

1-24E The mass of a substance is given. Its weight is to be determined in various units.

Analysis Applying Newton's second law, the weight is determined in various units to be

$$W = mg = (1 \text{ kg})(9.81 \text{ m/s}^2) \left(\frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) = \mathbf{9.81 \text{ N}}$$

$$W = mg = (1 \text{ kg})(9.81 \text{ m/s}^2) \left(\frac{1 \text{ kN}}{1000 \text{ kg} \cdot \text{m/s}^2} \right) = \mathbf{0.00981 \text{ kN}}$$

$$W = mg = (1 \text{ kg})(9.81 \text{ m/s}^2) = \mathbf{1 \text{ kg} \cdot \text{m/s}^2}$$

$$W = mg = (1 \text{ kg})(9.81 \text{ m/s}^2) \left(\frac{1 \text{ N}}{1 \text{ kg} \cdot \text{m/s}^2} \right) \left(\frac{1 \text{ kgf}}{9.81 \text{ N}} \right) = \mathbf{1 \text{ kgf}}$$

$$W = mg = (1 \text{ kg}) \left(\frac{2.205 \text{ lbm}}{1 \text{ kg}} \right) (32.2 \text{ ft/s}^2) = \mathbf{71 \text{ lbm} \cdot \text{ft/s}^2}$$

$$W = mg = (1 \text{ kg}) \left(\frac{2.205 \text{ lbm}}{1 \text{ kg}} \right) (32.2 \text{ ft/s}^2) \left(\frac{1 \text{ lbf}}{32.2 \text{ lbm} \cdot \text{ft/s}^2} \right) = \mathbf{2.21 \text{ lbf}}$$

1-25 The flow of air through a wind turbine is considered. Based on unit considerations, a proportionality relation is to be obtained for the mass flow rate of air through the blades.

Assumptions Wind approaches the turbine blades with a uniform velocity.

Analysis The mass flow rate depends on the air density, average wind velocity, and the cross-sectional area which depends on hose diameter. Also, the unit of mass flow rate \dot{m} is kg/s. Therefore, the independent quantities should be arranged such that we end up with the proper unit. Putting the given information into perspective, we have

$$\dot{m} \text{ [kg/s]} \text{ is a function of } \rho \text{ [kg/m}^3\text{]}, D \text{ [m]}, \text{ and } V \text{ [m/s]}$$

It is obvious that the only way to end up with the unit “kg/s” for mass flow rate is to multiply the quantities ρ and V with the square of D . Therefore, the desired proportionality relation is

$$\dot{m} \text{ is proportional to } \rho D^2 V$$

or,

$$\dot{m} = C \rho D^2 V$$

where the constant of proportionality is $C = \pi/4$ so that $\dot{m} = \rho(\pi D^2 / 4)V$

Discussion Note that the dimensionless constants of proportionality cannot be determined with this approach.

1-26 A relation for the air drag exerted on a car is to be obtained in terms of on the drag coefficient, the air density, the car velocity, and the frontal area of the car.

Analysis The drag force depends on a dimensionless drag coefficient, the air density, the car velocity, and the frontal area. Also, the unit of force F is newton N, which is equivalent to $\text{kg}\cdot\text{m}/\text{s}^2$. Therefore, the independent quantities should be arranged such that we end up with the unit $\text{kg}\cdot\text{m}/\text{s}^2$ for the drag force. Putting the given information into perspective, we have

$$F_D [\text{kg}\cdot\text{m}/\text{s}^2] \leftrightarrow C_{\text{Drag}} [], A_{\text{front}} [\text{m}^2], \rho [\text{kg}/\text{m}^3], \text{ and } V [\text{m}/\text{s}]$$

It is obvious that the only way to end up with the unit “ $\text{kg}\cdot\text{m}/\text{s}^2$ ” for drag force is to multiply mass with the square of the velocity and the frontal area, with the drag coefficient serving as the constant of proportionality. Therefore, the desired relation is

$$F_D = C_{\text{Drag}} \rho A_{\text{front}} V^2$$

Discussion Note that this approach is not sensitive to dimensionless quantities, and thus a strong reasoning is required.

1-27C Despite the convenience and capability the engineering software packages offer, they are still just tools, and they will not replace the traditional engineering courses. They will simply cause a shift in emphasis in the course material from mathematics to physics. They are of great value in engineering practice, however, as engineers today rely on software packages for solving large and complex problems in a short time, and perform optimization studies efficiently.

1-28 Design and Essay Problems



